



XF-7090U Cutting Machine 裁膜机




Product Features 产品特点

1. Adopt servo motor drive mode, with intelligent AI algorithm, to bring high quality experience for shaped cutting.
2. Camera positioning tracking system, accurate and sensitive, identify cutting all kinds of shaped patterns
3. Automatic contour extraction, no need for professional operators, reduce the threshold of equipment peration
4. Patented platform structure design, multi-zone vacuum adsorption design, low noise, strong suction power
5. LCD high-definition touch screen, so that the vision is more beautiful, more convenient control.
6. Fully expandable multiple transmission interfaces, USB, USB flash drive, Ethernet port.
7. The automatic feeding device easily achieves the perfect docking for long format cutting processing, and with the support of the camera positioning real-time tracking system, it achieves accurate and stable contour cutting.
8. Advanced high-end multi-axis high-speed servo motion control system developed by ourselves, accurate cuttingsmooth curve, high power strength to create a shocking work.
9. The streamlined sheet metal body, which is designed with care and texture, is unique in the beauty of technology.

- 1.采用伺服电机带动进口直线导轨传动模式，配合智能的AI算法，为您的异型裁切带来更优质的操作体验。
- 2.摄像头定位实时跟踪系统，精准灵敏，快速识别切割各类复杂异形图案
- 3.自动轮廓提取，巡边切割从此不再需要专业的电脑操作人员，大大降低设备操作员准入门槛
- 4.专利的平台结构设计，各区真空吸附设计，低噪音，强吸力，助力你小样片吸附轻松驾驭，
- 5.LCD高清触控屏，让视界更美丽，操控更便捷，
- 6.全面拓展多种传输接口，USB,U盘,以太网口,打造不同场景的高效切割体验，
- 7.自动送料装置轻松实现长幅面切割加工的完美对接，在摄像头定位实时跟踪系统的加持下，实现精准稳的轮廓切割
- 8.自主研发的先进高端多轴高速伺服运动控制系统，切割精准,曲线圆滑,高能实力制造震撼之作。
- 9.潜心设计,质感无处不在的流线型钣金机身,独居科技之美，

Product Advantages 产品优势

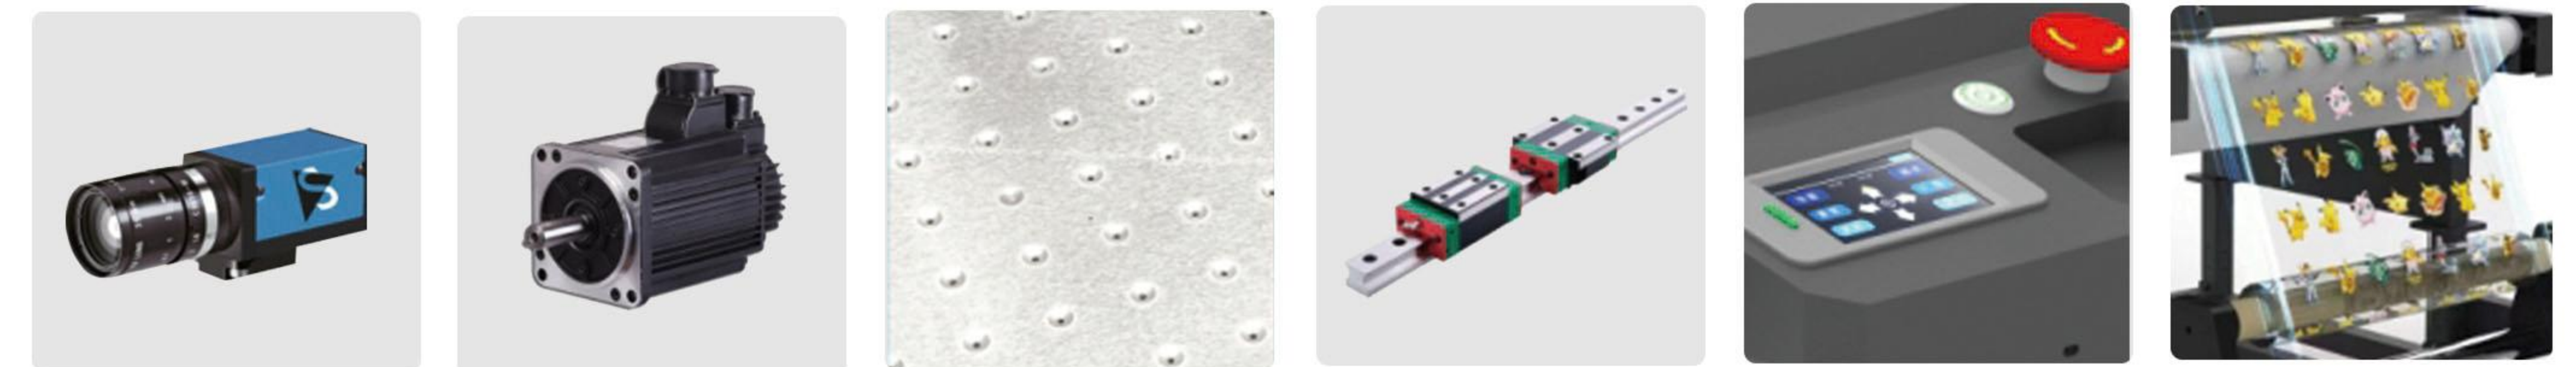

- Camera Location 摄像头定位
- High torque servo motor 高扭矩伺服驱动电机
- Vacuum adsorption 真空吸附
- Imported grade guide 进口级导轨
- Touch screen 高清触控屏
- Roll cutting 卷材切割

XF-7090U Cutting Machine 裁膜机

Model 型号	XF-7090U
Cutting Speed 切割速度	1~800mm/s
Cut Thickness 切割厚度	≤1.2mm
Cutting Pressure 切割压力	1000g
Cutting Material 切割材料	Crystal label stamping 水晶标 烫画
Cutting Method 切割方式	Physicsemi-pairfull paircut dry rubber magnetic paste and so on (plate class need to be optional to add vibration pair) 物理半刀全刀裁切干胶磁性贴等(板材类需选配加装震动刀)
Pen/Blade Type 笔型/刀型	Double blade structure 双刀结构
Fixing Method 固定方式	Double-frame adhesive/vacuum adsorption 双面胶粘贴/真空吸附
Drive Method 驱动方式	High-speed servo drive 高速伺服驱动
Mechanical Resolution 机械分辨率	0.05mm
Transmission Interface 传输接口	USB, u disk offline, the grid is not in use (WiFi option) USB、U盘脱机、网口(WIFI选配)
Compatible Software Formatsf 兼容软件格式	SignMaster/Ai/AutoCAD/CoralDraw,兼容刻字机输出软件
Screen Size 屏幕尺寸	Touch display 触摸显示
Operating Voltage/Power 工作电压/功率	220V±10%/50Hz
Cutting Area 切割面积	600mm*900mm(分段自动拉料)
Machine Size 机器尺寸	1460mm*1300mm*1000mm
Package Size 包装尺寸	1600mm*1300mm*1100mm
Machine Net Weight 机器净重	220kg
Gross Machine Weight 机器毛重	360KG

